




CHECK VALVE

10112-600 SERIES

IN-LINE

BALL TYPE
MALE JIC TO FEMALE SAE

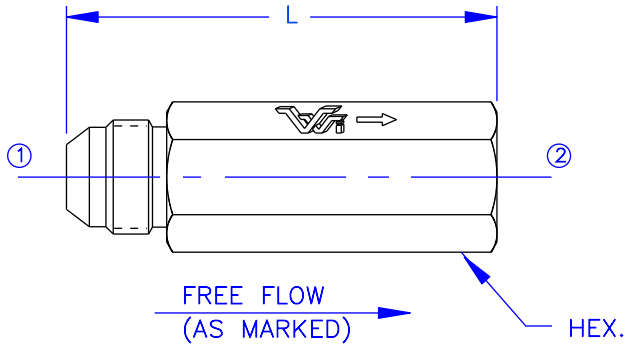

DESCRIPTION


- AN IN-LINE STYLE, CHECK VALVE INTENDED FOR BLOCKING FLUID FLOW.

OPERATION

- FLOW FROM "1" TO "2" IS ALLOWED WITH A STANDARD CRACK PRESSURE OF 5 PSI.
- FLOW FROM "2" TO "1" IS BLOCKED WITH A SPRING BIAS TO ASSIST IN STATIC AND LOW LOAD CONDITIONS.

FEATURES

- LOW INTERNAL LEAKAGE, 5 DPM.
- LOW PRESSURE DROP.
- STEEL BODY.
- CHROME BALL.
- NO INTERNAL PACKINGS.
- * SPECIAL CRACK PRESSURES AVAILABLE UPON REQUEST.



- SPECIFICATIONS -	
HYDRAULIC SYMBOL	
OPERATING PRESSURE	3500 PSI
TEMPERATURE RANGE	250°F TO -40°F
STANDARD CRACK PRESSURE	5 PSI *
ALL DIMENSIONS IN INCHES	

- ORDERING INFORMATION -	
ASSEMBLY NUMBER	10112-60X-XX
SERIES NUMBER	
THREAD SIZE	
CRACK PRESSURE (PSI)	
(IF NON-STANDARD)	

MODEL	CONN. 1	PORT 2	THREAD	FLOW CAPACITY	L	HEX.
10112-604	#4 JIC 37° FLARE	#4 SAE	7/16-20	2 GPM	1.93	0.625
10112-606	#6 JIC 37° FLARE	#6 SAE	9/16-18	4 GPM	1.94	0.750
10112-608	#8 JIC 37° FLARE	#8 SAE	3/4-16	6 GPM	2.56	0.938
10112-610	#10 JIC 37° FLARE	#10 SAE	7/8-14	10 GPM	2.82	1.000



Vonberg Valve, inc.

HYDRAULIC VALVE SPECIALISTS

3800 INDUSTRIAL AVE.
ROLLING MEADOWS, IL 60008-1085
PH: (847) 259-3800 FAX: (847) 259-3997