




# FLOW DIVIDER & COMBINER

27903

#16 SAE - #12 SAE PORTS

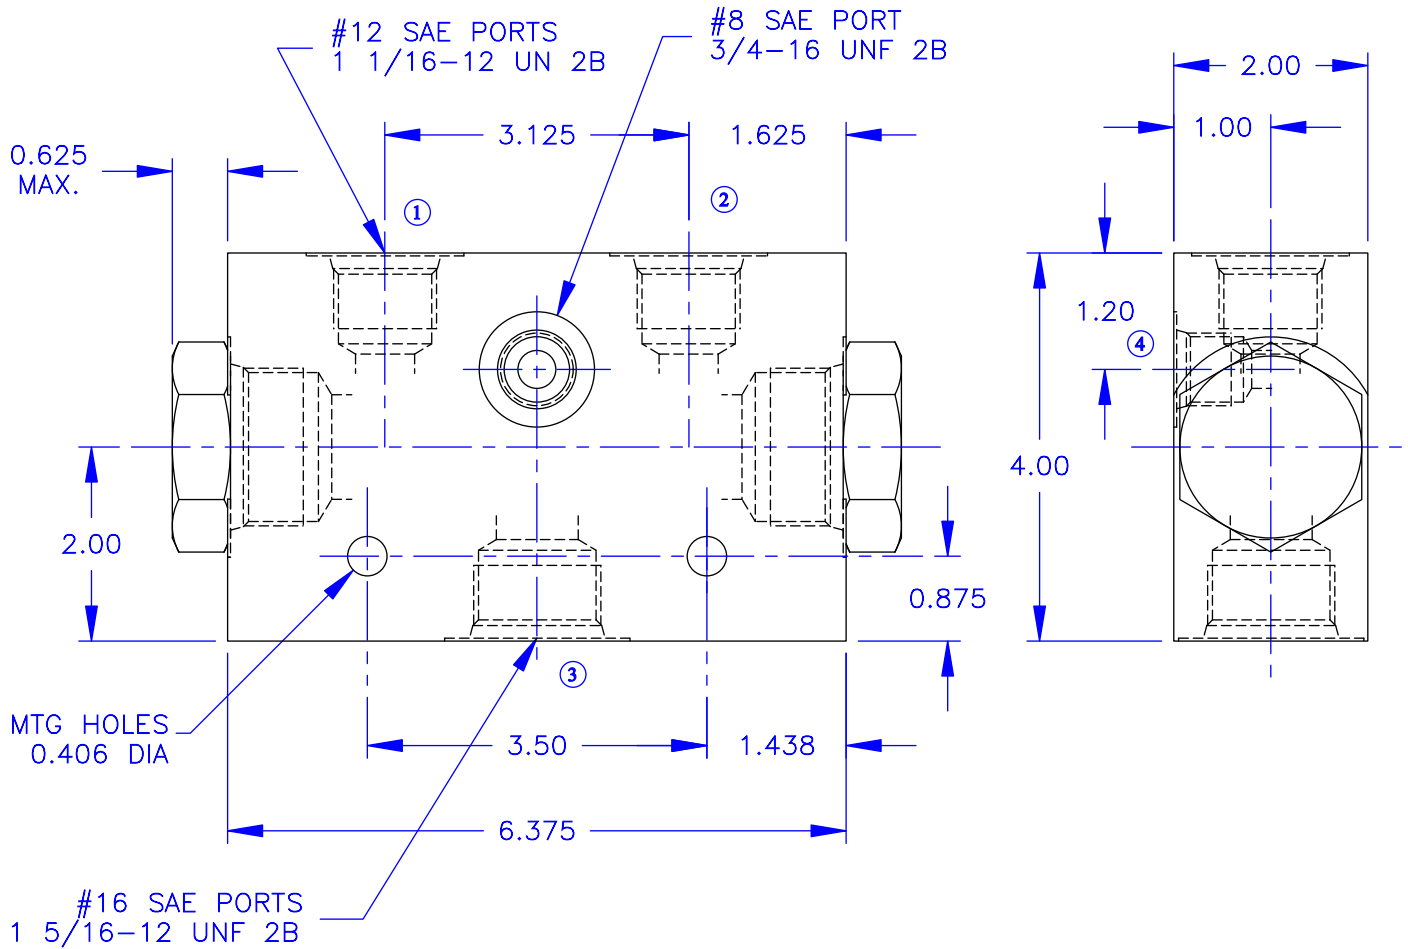

## - SPECIFICATIONS -

HYDRAULIC SYMBOL	
RATIO	50/50
MAX. PRESSURE	100 PSI
COMBINED FLOW RATE	10-30 GPM
PRESSURE RANGE	250 PSI TO 4500 PSI
TEMPERATURE RANGE	250°F TO -40°F
FLOW TOLERANCE	±10%
ALL DIMENSIONS IN INCHES	

## DESCRIPTION

- A SPOOL TYPE FLOW DIVIDER & COMBINER

## OPERATION

- PRESSURE COMPENSATED.
- INPUT FLOW TO PORT #3 IS DIVIDED WITH A 50/50 RATIO BETWEEN PORTS #1 AND #2.
- INPUT FLOW TO PORTS #1 AND #2 WILL BE COMBINED AT PORT #3.

## FEATURES

- ALUMINUM BODY, STEEL INTERNALS.
- HYDRAULIC FLUIDS - GENERAL.
- O-RINGS - BUNA-N 90 DURO.
- TAMPER RESISTANT.
- #8 SAE GAGE PORT.



**Vonberg Valve, inc.**

HYDRAULIC VALVE SPECIALISTS

3800 INDUSTRIAL AVE.  
 ROLLING MEADOWS, IL 60008-1085  
 PH: (847) 259-3800 FAX: (847) 259-3997